



AUTOMATION AND SWITCHGEAR

HTPRO

Professionals are born. Or made.

The best HT instruments
for daily use
in the automation
and switchgear industry





40 YEARS MARKING OUT SUCCESSFUL LINES

Research & Development

An office, **the throbbing heart of HT Italia**, a touchstone for every **business strategy**, the starting point of every new creation, tasked with supporting ideas and **converting them into innovative, high-performance instruments**. A perpetual fire that fuels a **continuously evolving company**, a present-day that is invariably also the future.

Head office

3.800
square metres

The warehouse

15.000
cubic metres

Italian sales network

15 AGENCIES
65 REGIONAL
SALES AGENTS
5 AREA
MANAGERS

Calibrations and repairs

For over 25 years, HT ITALIA has designed and built all circuit Testing and Analysis equipment in-house, allowing it to provide highly skilled technical support.

Today, with a view to providing an increasingly efficient service in line with Client expectations and thanks to an agreement with TRESKAL, HT ITALIA hosts its own separate, climate-controlled laboratory for the issue of Calibration Reports in accordance with ISO 9001, as well as Accredited Certificates (ACCREDIA) in accordance with ISO/IEC 17025.

Distributors

186

Manned points of sale

1160

Foreign sales network

70 DISTRIBUTORS

3 REGIONAL
MANAGERS

2 EUROPEAN
BRANCHES

Catalogued measuring instruments

more than
680



STORYTELLING

Concern and consideration for doing things right, a wealth of experience acquired over the years, an innate sense for innovation, a Future-oriented project cultivated day by day have all made **HT Italia one of the most important and exemplary companies in the Market for electrical measuring instruments** and a key **point of reference** for those, who, over time, have wanted or needed to approach this world from which they demand only the very best.

Latest-generation technology, state-of-the-art infrastructure, unique industry expertise, people, a team, the backbone that year after year, has guaranteed our success and allowed continuous **growth** on a global scale, from every point of view.

Putting forward our expertise, managing and transforming it into exclusive, high-performance instruments, catering to every specific need, is the challenge that has guided HT for more than 40 years and a means of addressing change, **investing in the skills** and trust of an increasingly demanding and evolved target market.

A modus operandi ensuring the **added value** of a continuously evolving organisation.

Certifications



Certified laboratory
LAT174
of TRESICAL MS
 at the HT-Italia head office







SAFETY FIRST

Electrical measuring instruments, prior still to fulfilling their purpose, must consider operator safety as a basic requirement in terms of protection against temporary overvoltages that may arise due to the presence of complex electrical loads, short-circuit situations, lightning strikes, etc.

To this end, the international standard IEC 61010-1, harmonised in Europe as EN 61010-1, has set out specific requirements that must be satisfied by

electrical equipment designed for LV measurements (<1000VAC), creating four “Overvoltage Categories” that define the level of protection against the voltage transients of each instrument, depending on its distance from the power source.

Instruments belonging to the highest category require greater internal protection insofar as they can operate close to the source. A short description is provided below:

	TYPE OF MEASUREMENT	APPLICATION
	Measurements on circuits not directly connected to the distribution network	Protected electronic equipment, measurements not derived from mains
	Measurements on circuits directly connected to the low-voltage installation	Household appliances, hand-held tools and the like
	Measurements on installations inside buildings	Distribution panels, cable harnesses, switches, fixed installation sockets, electric motors, industrial equip.
	Measurements on a source of a low-voltage installation	Electricity meters, measurements on primary overcurrent protection devices, ripple control units



CIRCUIT ANALYSERS

HTPRO - AUTOMATION AND SWITCHGEAR



There are two main standards governing the field of automation and switchgear: 61439-1, which regulates both automation and distribution switchgear, and 60204-1, which covers the machine manufacturing category.

In order to obtain CE certification, all automation and distribution switchgear solutions must necessarily be tested with compliant instrumentation according to EN 61439-1, which sets out a series of electrical tests to be performed on the equipment.

Similar tests must also be carried out on the machinery in order to be certified according to EN 60204-1, which is similar to 61439-1 but a few differences.

In addition to this, HT ITALIA also offers instrumentation for measuring and generating process signals, as well as clamps and multimeters specifically for automation.

FULLTEST3 an instrument that complies with both EN 61439-1 and EN 60204, FULLTEST allows all mandatory and optional electrical tests to be carried out in compliance with the afore-mentioned standards.

It features high-tech peripherals for exporting the saved data and includes the possibility to create guided test sequences to speed up the testing process, making it the ideal instrument for every panel and machine builder looking to certify their products.



METEL HV000003

FULLTEST3

MULTIFUNCTIONAL INSTRUMENT

TOUCH
SCREEN
SYSTEM



APPLICATIONS

For safety testing on machinery and switchgear in accordance with IEC/EN60204-1 and IEC/EN61439-1



CERTIFICATO DI
CALIBRAZIONE

FEATURES

A single instrument for switchgear and machine certification according to 61439-1 with testing of continuity up to 25 A, insulation up to 1000 V DC and dielectric strength up to 5100 V AC, professional report creation via TOPVIEW software, AUTOTEST function, calibration certificate included



MULTIMETERS

HTPRO - AUTOMATION AND SWITCHGEAR



HT8051 / HT8100 HT ITALIA process calibrators allow professionals to measure and generate 0-10 V and 4-20 mA signals with high precision, a key parameter in this field.



METEL **HP080510**

HT8051

PROFESSIONAL
PROCESS CALIBRATOR

APPLICATIONS

- Process signal simulation
- Fault detection
- Control loop testing

FEATURES

TRMS, AC/DC voltage max 10VDC, AC/DC current max 24mADC, Transducer output current measurement, Simulation of an external transducer, Loop power supply with 24V minimum voltage, Selectable ramp generation, Backlit LCD display, Auto power-off



METEL **HV008100**

HT8100

PROFESSIONAL PROCESS
MULTIMETER/CALIBRATOR

APPLICATIONS

- Process signal simulation
- Fault detection
- Control loop testing

FEATURES

TRMS, AC/DC voltage max 10VDC, AC/DC current max 24mADC, Transducer output current measurement, Simulation of an external transducer, Loop power supply with 24V minimum voltage, Selectable ramp generation, Backlit LCD display, Auto power-off



TEST INSTRUMENTS

HTPRO - AUTOMATION AND SWITCHGEAR



HT64 / HT63 / HT9025 HT64 provides a graphical display of the measured electrical quantities and the possibility to measure 4-20 mA. This last function is also available in the HT63, which has 60,000 counts.

The HT9025 AC/DC clamp, on the other hand, allows accurate measurements even in the presence of harmonic distortions thanks to the VFD and AC+DC function.

METEL **HR00064P**

HT63P | HT64P

DIGITAL MULTIMETER

→ **TRMS**
AC+DC **6,000**
COUNTS

APPLICATIONS

High-performance TRMS multimeters with graphical display of measured quantities and high precision



CERTIFICATO DI CALIBRAZIONE

FEATURES

TRMS measurements up to 60,000 counts, 4-20 mA process signal control, graphical display of measured quantities, current measurements with supplied AC/DC current clamp



METEL **HP009025**

HT9025

PROFESSIONAL CURRENT CLAMP

→ **TRMS**
AC+DC **DC VOLTAGE**
MAX **1500V** **COLOUR**
DISPLAY

APPLICATIONS

For high AC and DC current measurements and ideal for applications with distortions and harmonics, especially in the automation field



CERTIFICATO DI CALIBRAZIONE

VFD
FUNCTION

FEATURES

AC/DC current up to 1000A, DC voltage up to 1500V, inrush current measurement, LoZ low-impedance voltage input, resistance and continuity, capacitance and diode test, temperature with K-probe, colour display, external transducer input for measurements up to 3000A





THERMAL IMAGERS

HTPRO - AUTOMATION AND SWITCHGEAR



THT80 / THT200 / THT300 In the automation industry, we typically find electrical and mechanical components that, over time, present a risk of failure with consequent downtime and inconvenience.

Thermal imaging allows preventive checks on electrical and mechanical components like switches, electronic circuit boards and motors, thus preventing them from becoming a problem.

METEL **HN000080**

THT80

COMPACT TOUCH-SCREEN
THERMAL IMAGER



120x90
PIXEL

TEMPERATURE RANGE
-20°C ÷ 550°C

APPLICATIONS

Inspection and maintenance
on components at a distance
of maximum 1.5 m and
temperatures up to 550°C



CERTIFICATO DI
CALIBRAZIONE

FEATURES

PictureinPicture function, AutoFusion
function, thermal sensitivity:
<0.05°C @ 30°C / 50mK.
Compatible with HT Pro Camera app



THERMAL IMAGERS

HTPRO - AUTOMATION AND SWITCHGEAR



METEL HN000200

THT200

HIGH-TECH, PROFESSIONAL
TOUCH-SCREEN THERMAL IMAGERS



160x120
PIXEL

TEMPERATURE
RANGE
-20° ÷ 650°C

FIELD
OF VIEW
20.7°x15.6°

APPLICATIONS

Maintenance on mechanical
and electrical components
including switchgear, switches,
busbars, kiosks, motors and
electrical cables.



CERTIFICATO DI
CALIBRAZIONE

FEATURES

Picture in Picture function,
AutoFusion function,
thermal sensitivity:
<0.05°C @ 30°C / 50mK

METEL HN000300

THT300

HIGH-TECH, PROFESSIONAL
TOUCH-SCREEN THERMAL IMAGERS



384x288
PIXEL

TEMPERATURE
RANGE
-20° ÷ 650°C

FIELD
OF VIEW
41.5°x31.1°

APPLICATIONS


Maintenance on mechanical
and electrical components
including switchgear, switches,
busbars, kiosks, motors and
electrical cables.



CERTIFICATO DI
CALIBRAZIONE

FEATURES

Picture in Picture function,
AutoFusion function,
thermal sensitivity:
<0.05°C @ 30°C / 50mK

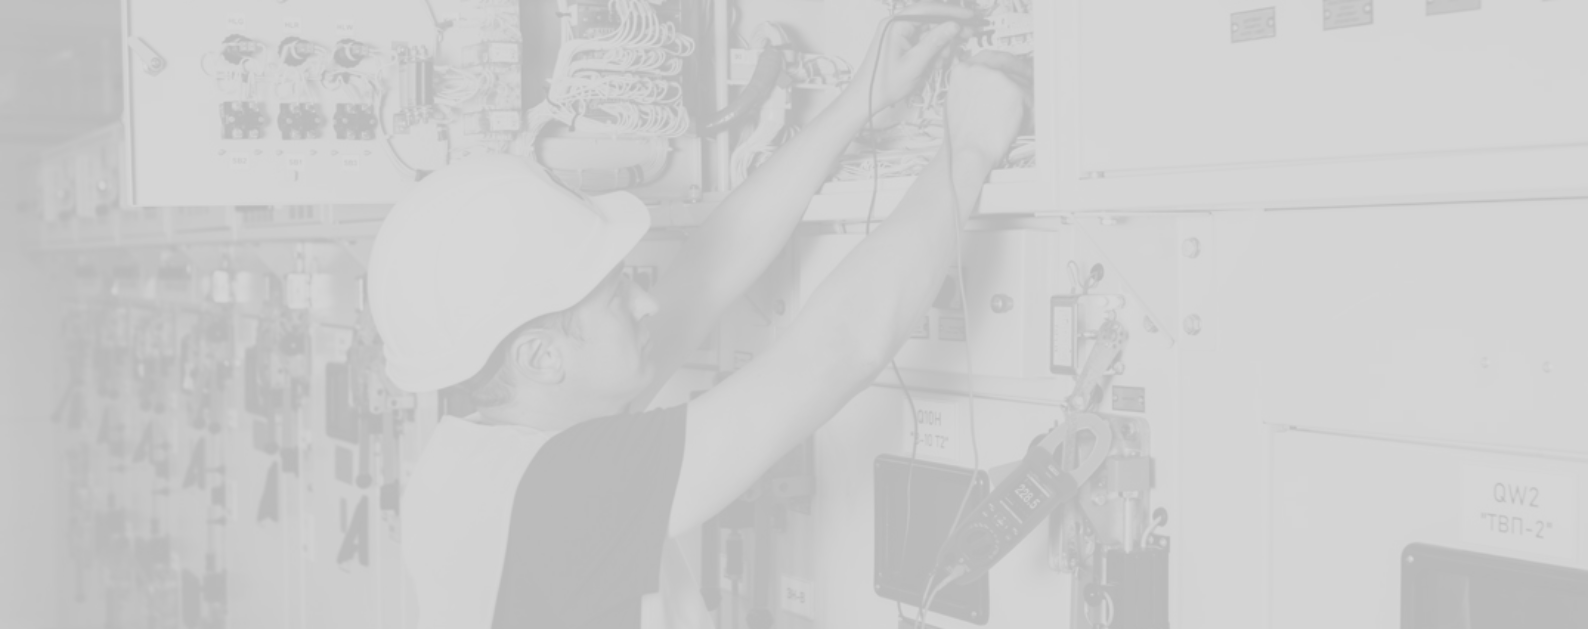

AUTOMATION AND SWITCHGEAR

HTPRO



HT ITALIA S.R.L.

Via della Boaria, 40 48018 Faenza (RA) Italy

T +39 0546 621002 | **F** +39 0546 621144

M vendite@ht-instruments.com | **ht-instruments.com**